

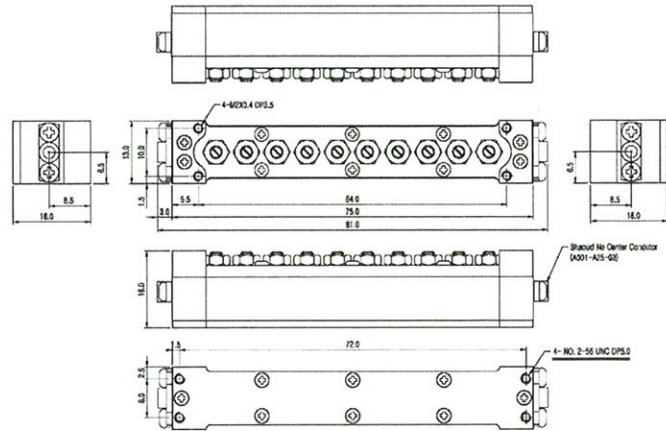


2.0 ~ 6.0GHz Filter Bank



Item	Specifications		
	BPF1	BPF2	BPF3
Frequency Range	2.0 ~ 3.65GHz	3.15 ~ 4.85GHz	4.35 ~ 6.0GHz
Insertion Loss (Max.)	2.5dB		
Ripple (Max.)	1.0dB		
Return Loss (Min.)	15dB		
Attenuation	60dBc Min.	FI-650MHz	FI-800MHz
	60dBc Min.	Fh+1700MHz	Fh+1600MHz
	30dBc Min.	7.5~12.0GHz	7.5~15.0GHz
IN/OUT Port	GPO Conn.		
Weight (Max.)	26 g		

[BPF1]

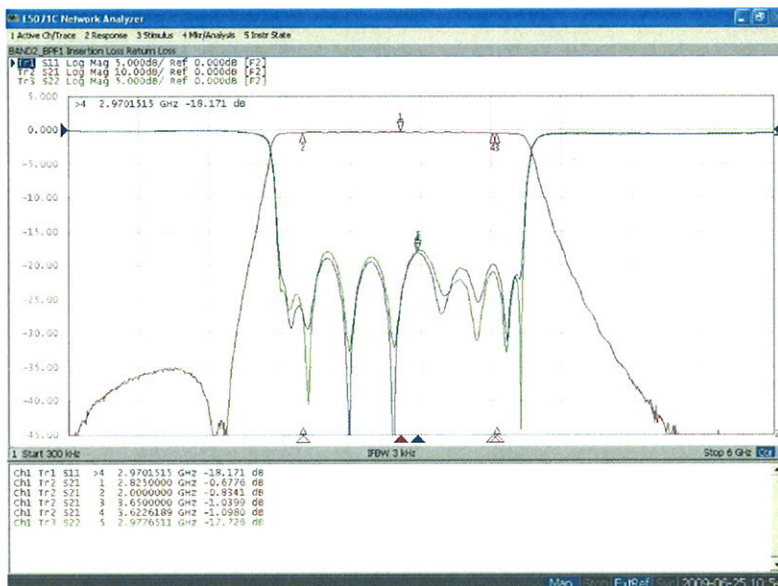

IROM Tech.Inc

102-1006, Digital Empire2, Sin-Dong, Yeongtong-Gu,
Suwon-Si, KyungKi-Do, South Korea

tel : 82-31-695-7095

fax : 82-31-695-7096

e-mail : irom@e-irom.com

web : www.e-irom.com