



X-Band RX/TX CH Filter

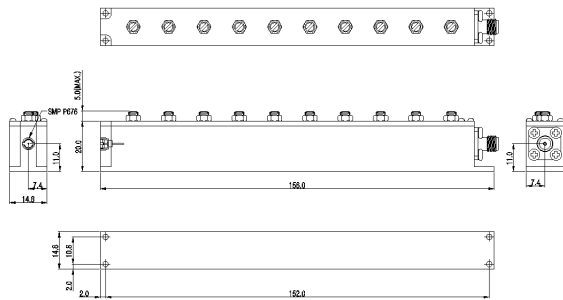

X-Band RX CH Filter

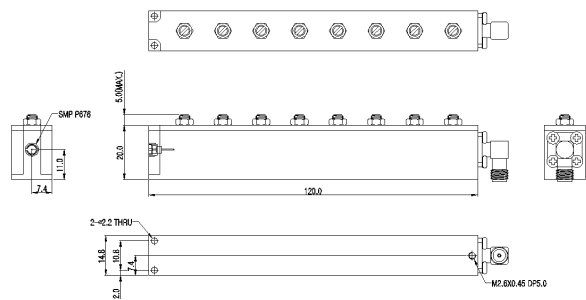

X-Band TX CH Filter

Item	Specifications	
	RX CH Filter	TX CH Filter
Frequency Range	7150 ~ 7720MHz (CH1 ~10) CH : $F_c \pm 36.25\text{MHz}$	
Insertion Loss (Max.)	2.5dB	1.4dB
Ripple (Max.)	0.8dB	0.7dB
	0.7dB	0.6dB
Return Loss (Min.)	17dB	
Attenuation(Min.)	100dBc @ $F_c \pm 88.75\text{MHz}$	40dBc @ $F_c \pm 73.5\text{MHz}$
		70dBc @ $F_c \pm 88.75\text{MHz}$
In Port	SMA - Female	SMA - Female
Out Port	SMP - Male	
Temperature Range	-40 ~+65	